

LS902UT Vision Master 1451



19"
monitor




- High Contrast 19" (18" viewable) Shadow Mask FST screen
- 0.26mm (0.22mm horizontal) dot pitch, dual focus CRT, for a crisp clear, dynamic display
- High resolution On-screen Display for ease of set up and use
- Simply to operate 4 push button controls
- Ergonomic design: TCO'99 and MPRIII approved

iiyama

a visible difference

LS902UT Vision Master 1451

Model	LS902UT Vision Master 1451	Controls	High resolution on-screen display menus
CRT	19", High Contrast FST CRT, (18", 46cm viewable)	Power management	VESA-DPMS, EPA Energy star® and Nutek
Dot pitch	0.26mm (0.22mm horizontal, 0.13mm vertical)	Power consumption	130W maximum in normal use 5W maximum in power management mode
Sync frequency	Horizontal: 30.0 - 96.0kHz, Vertical: 50 - 160Hz	Screen controls	Brightness, Contrast, H-Size, H-Position, V-Size, V-Position, Zoom, Degauss, Pin-Cushion, Trapezoid, Pin-balance, Rotation, Parallelogram, Preset colour temperature for 9300K, 6500K and User definable, H/V-Moire Reduce, Recall
Video bandwidth	200MHz dot clock	Color temperature	9300K, 6500K and user selection
Resolution	640 x 480 @ 160Hz 800 x 600 @ 152Hz 1024 x 768 @ 118Hz 1152 x 864 @ 105Hz 1280 x 1024 @ 89Hz 1600 x 1200 @ 76Hz 1800 x 1440 @ 64Hz	Approvals	TCO'99, CE, TÜV-GS/MPRII/ISO 9241-3, PTB, FCC-B, UL, CSA, DHHS, Department of Health (Canada)
Input connectors	15 pin D-sub fixed	Warranty	3 years on-site (in Benelux)
Plug & Play	VESA DDC 1/2B™		
Number of signal storage	Factory-presets: 8 User memory locations: 20 Automatically saved		
Dimensions	460 x 459 x 460.5mm (WxHxD)		
Net weight	18kg		

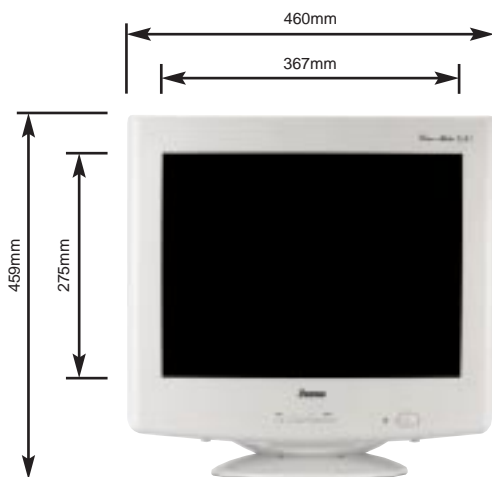

iiyama

a visible difference